




V120

**PURE GRAPHITE TAPE
PRE-FORMED GRAPHITE RINGS
COMPRESSION GRAPHITE RINGS**

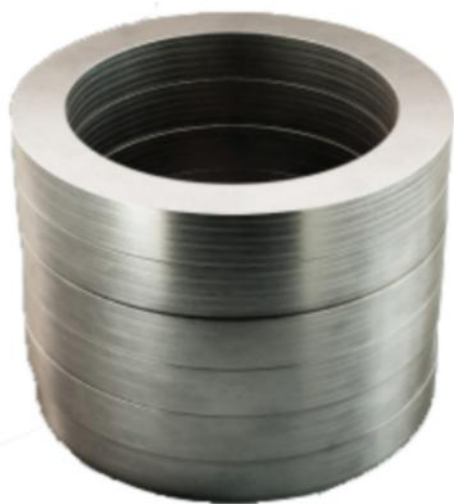

Features

Valves and rotary equipment handling virtually any media.

V120 is ideally suited for:

High temperature steam
Demineralised water
Heat transfer media
Petroleum products
Inorganic and organic acids
Alkalis
Hot waxes and oil

PRESSURE	
25 bar	362 psi
60 bar	870 psi
200 bar	2900 psi
TEMPERATURE	
-200°C + 600°C in air -200 + 3000°C inert	5432°F
VELOCITY	
30 m/s	6000 ft/min
3 m/s	600 ft/min
2 m/s	400 ft/min
pH VALUE	
0 - 14	0 - 14

Design Description

V120 graphite moulded rings are high-efficiency, moulded graphite sealing rings, produced to precise density and size.

V120 has outstanding sealing performance over long adjustment free periods. It has excellent chemical resistance and has a very wide temperature range.

